


Defective product remover for electronic components

Usage A mechanism to remove defective electronic components from the conveyor.

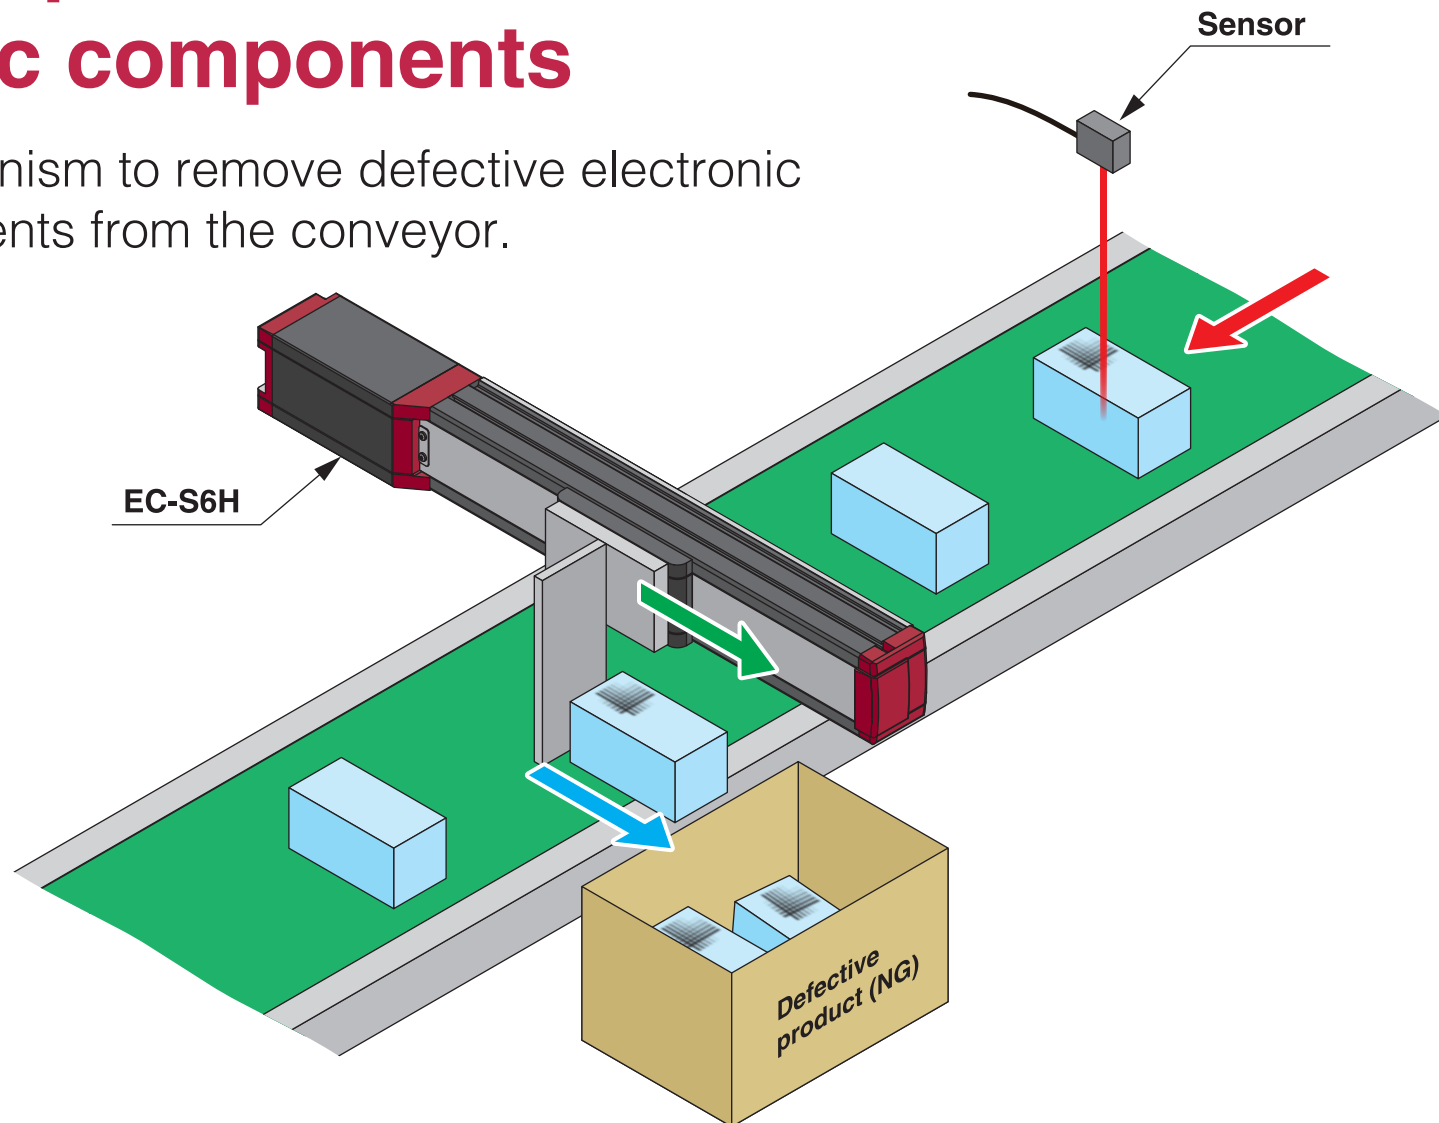

Explanation The speed of the movement immediately after the forward signal turned ON upon having a defective product detected by the sensor, and returning to the standby position upon removing the defective product is faster than of the air cylinder, allowing the conveyor to run faster than before.